





SIGN	DESCRIPTION	DATE	APPROVER
△	变更前90度是F5103, 变更后90度是F5104	YangMing	2014.08.12

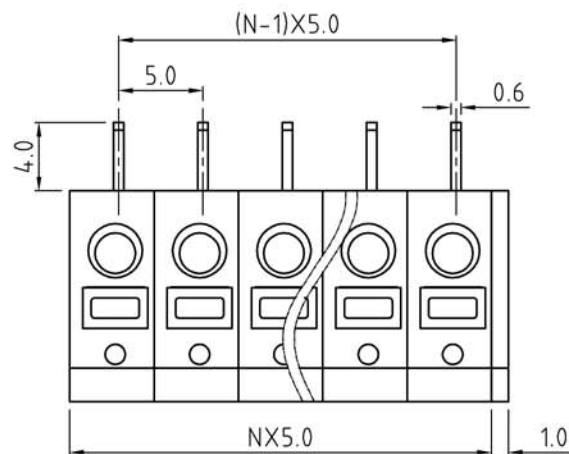

N=Number of contacts

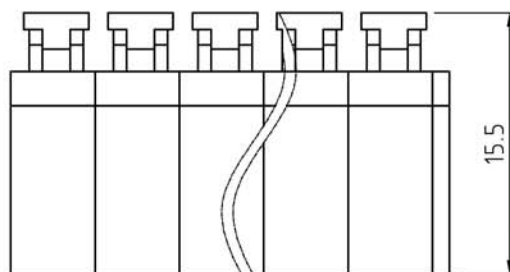

P.C.B. LAYOUT

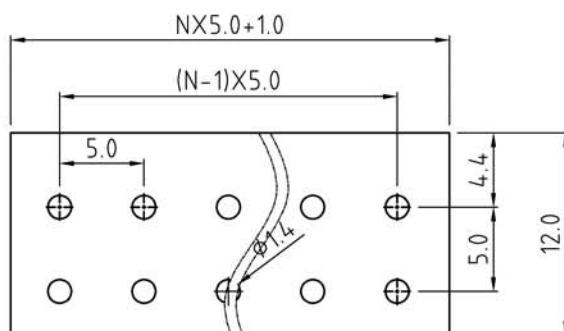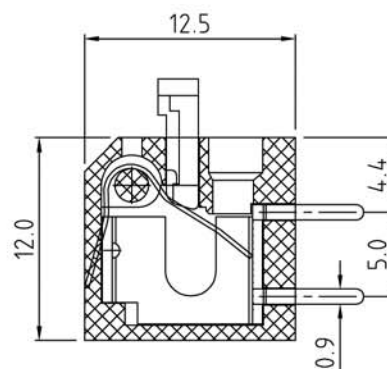

Technical Data:

Material:

Contact : Copper Alloy Tin plated

Wire guard : stainless steel

button : Polyamide(Glass filled)(UL94V-0)

Insulator body(housing) : Polyamide(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 10 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire Range:14-22Awg

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

△ F51 -04-5 -XX - 0 0 X 0

2 02
~ ~
24 24

5 Green
6 Blue
8 Grey
A Black

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED:	NAME: F51-04 pitch 5.0mm - series
	CHECKED:	
	DRAWN: Yang Ming 2014.08.12	
	UNITS: mm REV: B	PART NO: F51045XX00X0
	SCALE: 3 / 1 PAGE: 1 / 1	DWG NO: 9F5104501B