

1



2

3


4

5

SIGN	DESCRIPTION	DATE	APPROVER

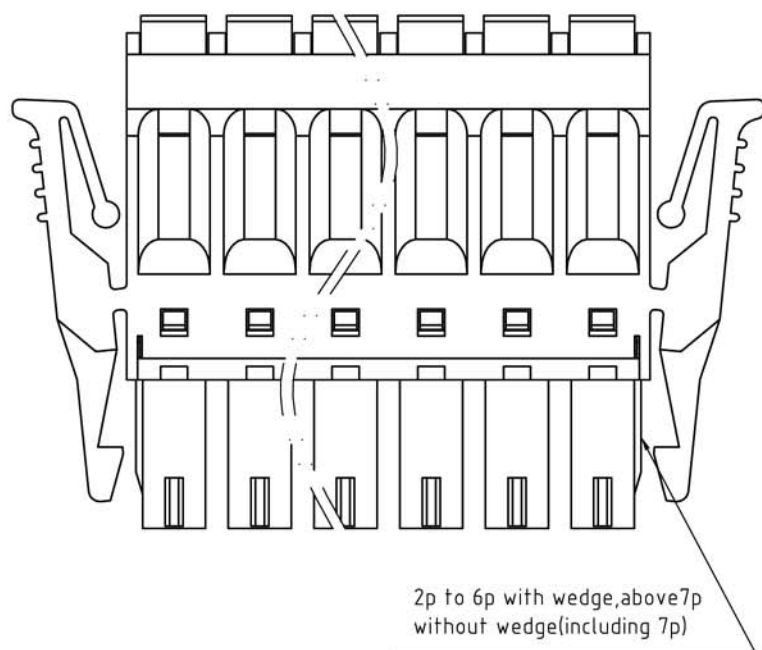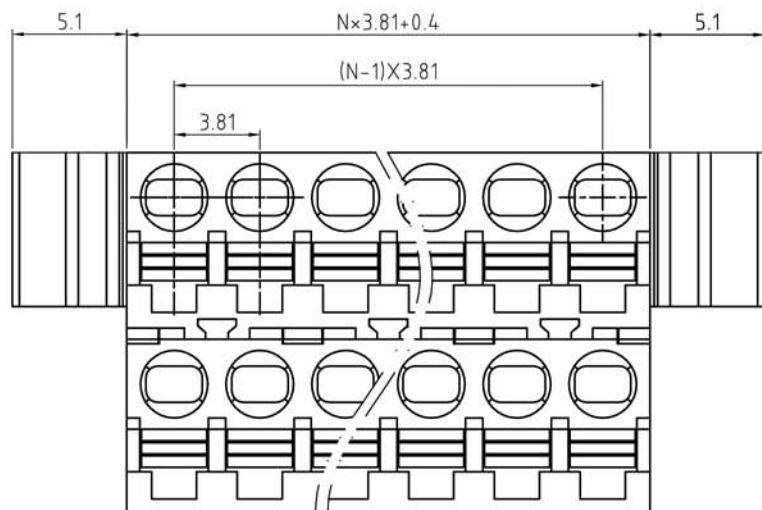

N=Number of contacts

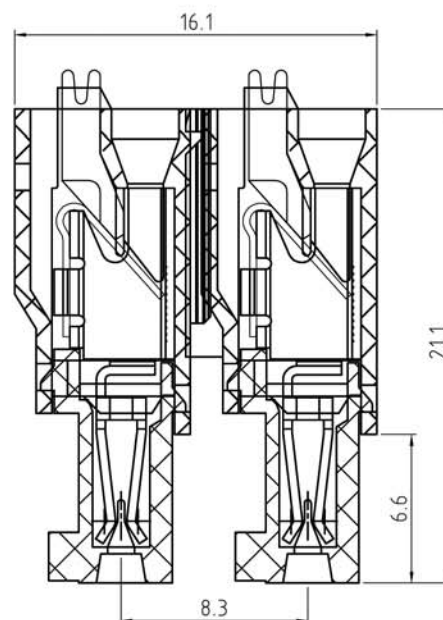

Technical Data:

Material:

terminal: Copper Alloy with Tin plated

Spring Clamp: Stainless steel

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 12 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 16-24AWG

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F73 - V - C XX - 0 0 3 X 0 0 0 0

2 02
~ ~
24 24

5 Green
6 Blue
8 Grey
A Black

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F73 - V - pitch3.81mm
X.X ±0.30	DRAWN: Ling Yu	- series 有耳卡鉤
X.XX ±0.20	2014.07.12	
X° ±1°	UNITS: mm	PART NO: F73VCXX003X0000
	SCALE: 4 / 1	DWG NO: 9F73VC001A
	REV: A	
	PAGE: 1 / 1	