

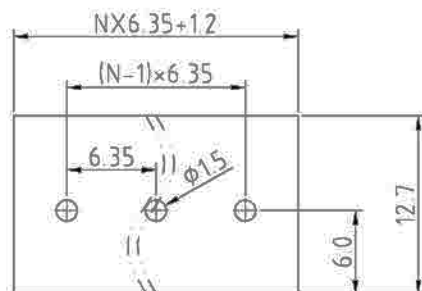


N=Number of contacts



PCB LAYOUT

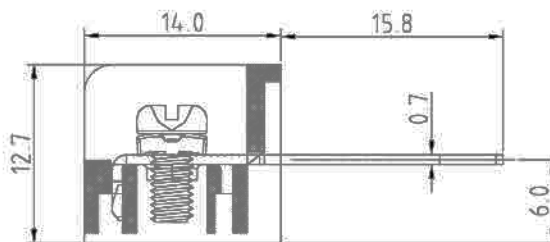

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Terminals: Copper Alloy Tin plated

Terminal screw: Steel galvanized with Cr3+ plated

Insulator body(housing): Polyamide (Glass filled)(UL94V-0)

Electrical

Voltage rating: 250VAC

Current rating: 10 Amps/way max

Contact resistance: 20mΩ (max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 18-22AWG

Mechanical:

Torque: 7kgf.cm/M3.0

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

U 3 2 2 - 6 - F X X - X X X 0

A: Black Pa66

B: Black Pbt

1: With flange

2: Without flange

1: "- Screw Cr3+

2: "-/+ Screw Cr3+

3: "- Screw Ni Plated

4: "-/+ Screw Ni Plated

02 2Pin

To To

32 32Pin

WELINK

上海拓尔普电子科技有限公司

Welink International Co., LTD.

TOLERANCE: X ±0.50 X.X ±0.30 X.XX ±0.20 X* ±1*	APPROVED: CHECKED: DRAWN: Ling Yu 2014.01.04	NAME: U322-6 Pitch 6.35mm- Without flange series
UNITS: mm SCALE: 2.5 / 1	REV: A PAGE: 1 / 1	PART NO: U3226FXX22X0 DWG NO: 9U3226F01A