

1

2

3

4

5

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Terminals: Copper Alloy, Tin Plated

Terminal screw: Steel galvanized with Cr3+ plated

Insulator body(housing): Polyamide (Glass filled)(UL94V-0)

Electrical

Voltage rating: 250VAC

Current rating: 15 Amps/way max

Contact resistance: 20m Ω (max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 16-22AWG

Mechanical:

Torque: 6kgf.cm/M3.0

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C $\pm$ 10°C

5 seconds max

Ordering Information:





U575 - 1 - G XX - X X X 0

A Black Pa66
B Black Pbt

1 With flange
2 Without flange

1 "-"Screw Cr³⁺
2 "-/+ "Screw Cr³⁺
3 "-"Screw Ni Plated
4 "-/+ "Screw Ni Plated

02 2Pin
To To
32 32Pin

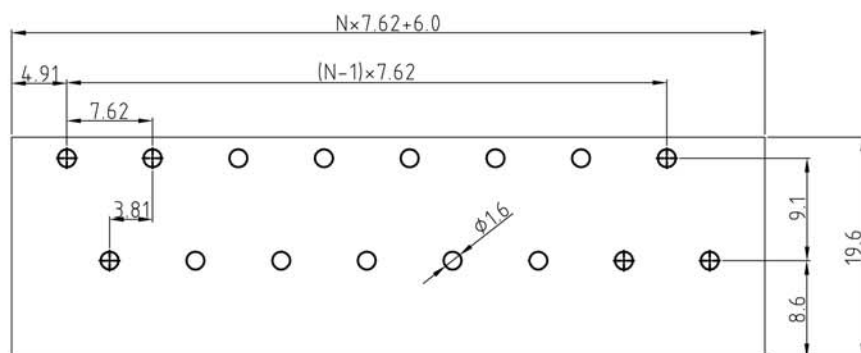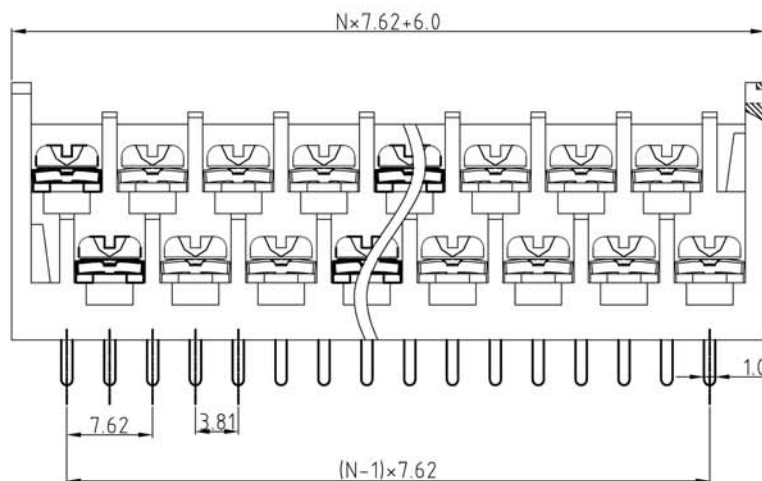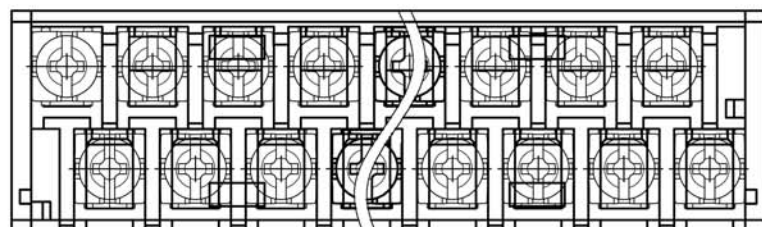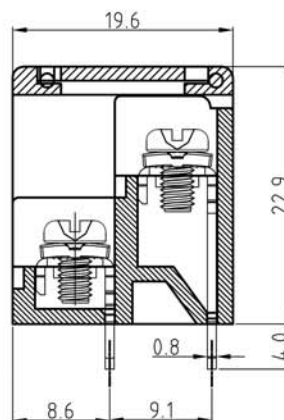

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ± 0.50	CHECKED:	U575-1 Pitch 7.62mm
X.X ± 0.30	DRAWN: Ling Yu	series
X.XX ± 0.20	2013,11,05	
X° $\pm 1^\circ$	UNITS: mm	PART NO: U5751GXX22X0
	SCALE: 2 / 1	DWG NO: 9U5751G02A
	REV: A	
	PAGE: 1 / 1	